

SYMPAPRESS. Success without CE approval



Modern refuse collection - without CE certification

The SYMPAPRESS is the perfect collection vehicle for the removal of household and commercial refuse. Built as a simple version of the proven VARIOPRESS, the SYMPAPRESS is ideal for countries outside the EU. Designed to meet the most varied customer requirements, the rear-loader can be equipped with a special FAUN lifter which can pick up two or four-wheeled containers from 400 to 1,100 litres in only 9 or 14 seconds respectively, with a lifting force of up to 1,000 kg.


Unbeatable quality

The SYMPAPRESS is manufactured in accordance with European production standards and therefore promises both long service life and high quality. All spare parts will remain available over a long period of time, at least for a minimum of ten years. Equipped with a modern, low-maintenance CAN BUS control system and with quality components such as pistons, cylinders or hydraulic parts from name-brand manufacturers, the SYMPAPRESS impresses by its performance and long service life. Minor repairs can be carried out quickly and simply by the customer himself.


Safety takes priority

In the case of the SYMPAPRESS as with all FAUN products, the safety and operating comfort of the crew are a major priority. Hand-grips plus the semi-automatic loading mechanism cycle help to avoid accidents. All control functions are available in a compact operating unit on the tailgate. In this way the crew have everything in view and everything to hand - a decisive contribution to safety at work.

SYMPAPRESS. Technical data

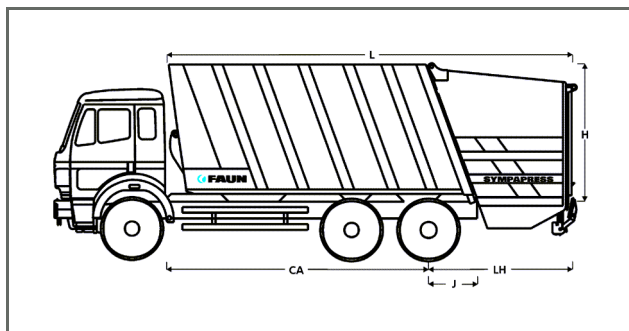

Containers of different sizes can be taken up:

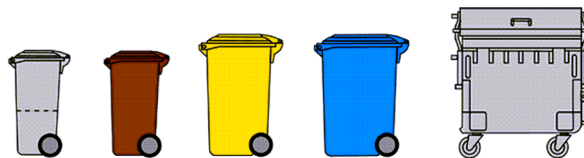

Body		312	314	516	522
Body capacity	m ³	13	15	16	22
Weight appr. 1)	kg	4.910	4.990	5.450	5.920
Length (L) appr.	mm	4.970	5.770	5.770	7.100
Width appr.	mm	2.300	2.300	2.500	2.500
Height (H) appr.	mm	2.250	2.320	2.250	2.320

Chassis recommendation 2)

G. V. W.	t	16	16	19	26
Weight appr.	kg	4.490	4.510	6.550	8.680
Wheelbase standard cab appr.	mm	3070	3350	3800	3850
Frame overhang (J) appr.	mm	620	610	800	700
CA measure (CA) appr. 5)	mm	2.600	3.400	3.400	4.900

Example complete vehicle 2)

Height, unladen appr.	mm	3.380	3.380	3.470	3.440
Height, tailgate open appr.	mm	5.540	5.540	5.780	5.750
Length appr.	mm	6.990	7.260	8.150	9.450
Overhang (LH) appr. 3)	mm	2.540	2.520	2.880	2.780
Weight appr. 6)	mm	9630	9740	12230	14830
Payload appr. 4)	kg	6.370	6.260	6.770	11.170

The chart includes only the common standard types.

- 1) Including auxiliary interface (acc. DIN 70020).
 - 2) Variations possible depending on chassis type and optional equipment fitted.
 - 3) Measurement from centre of rearmost axle to rear edge of tailgate, variations possible depending on chassis.
 - 4) Payload will decrease when mounting optional or special equipment to chassis or body. Payload achieved may vary depending on density of collected material.
 - 5) Permissible axle load spreading has to be checked depending on weight variation of rear axle unit. Space required to manoeuvre exhaust and induction devices has to be considered.
 - 6) Weight without lifter, lifter weight appr. 490 kg.
- Subject to change without prior notice.

SYMPAPRESS-A-05/2004-E

For UK requests:

FAUN Municipal Vehicles Ltd.
 Llangefní, Isle of Anglesey
 North Wales LL77 7XA
 Great Britain
 Phone: +44 1248 7227-77
 Fax: +44 1248 7502-20
 Internet: www.FAUN.co.uk
 E-Mail: sales@FAUN.co.uk

 **FAUN**
 KIRCHHOFF GROUP

FAUN Expotec GmbH
 Stefanstraße 2
 58638 Iserlohn
 Germany
 Phone: +49 2371 8293-00
 Fax: +49 2371 8293-09
 Internet: www.FAUN.com
 E-Mail: info@FAUN.com